


NON-ROTATING
SPINDLE

DATA
OUTPUT



3580-25A

- Resolution 0.001mm/0.00005"
- Non-rotating spindle
- Button function: on/off, set, mm/inch, data transmit
- Data output
- Automatic power off
- Ratchet stop
- Supplied with 7 pairs of anvil/spindle tip
- Setting standards are included (except 0-25mm/0-1")
- Optional accessory: 55° anvil/spindle tip code **3280-SP1** and **3280-SP2**, wireless transmitter code **7315-31** (receiver is needed) page 6, bluetooth transmitter code **7214-31** page 12, data output cable code **7302-31** page 20

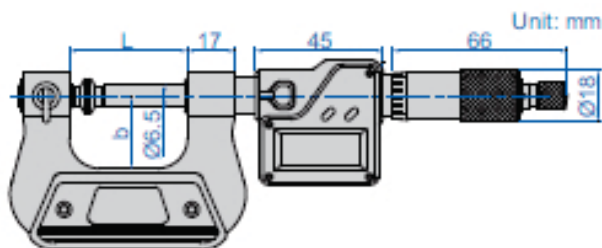

(mm)					
Code	Range	Accuracy	L	b	
3580-25A	0-25mm/0-1"	±4µm	42	26	
3580-50A	25-50mm/1-2"	±4µm	67	38	
3580-75A	50-75mm/2-3"	±5µm	92	50	
3580-100A	75-100mm/3-4"	±5µm	118	62	
3580-125A	100-125mm/4-5"	±6µm	143	70	
3580-150A	125-150mm/5-6"	±6µm	168	82	
3580-175A	150-175mm/6-7"	±7µm	192	95	
3580-200A	175-200mm/7-8"	±7µm	217	107	

DIGITAL UNIVERSAL MICROMETERS

Anvil/spindle tip (included)

Unit: mm

Flat		
Spherical		
Spline		
Disk		
Blade		
Knife-edge		
Point		

55° anvil/spindle tip (optional)

Unit: mm

Code 3280-SP1 Knife-edge		
Code 3280-SP2 Point		