




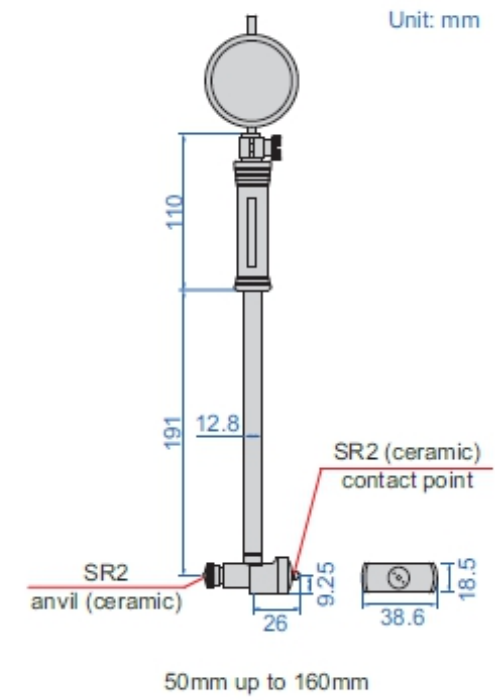


BORE GAUGES (WITH CENTERING PLATE)

ATTENTION: NOT SUITABLE
FOR 0.001MM DIAL INDICATORS

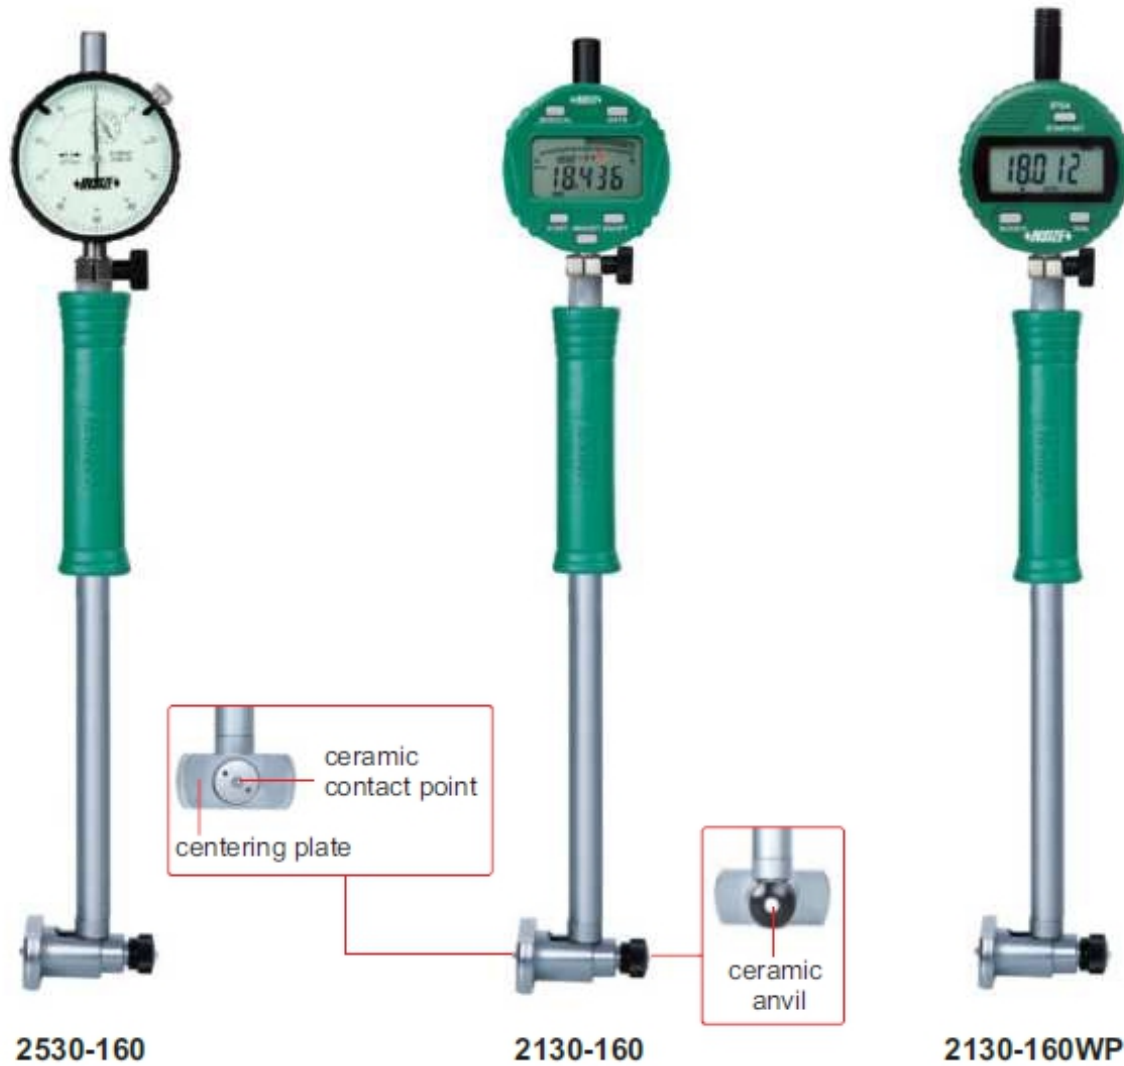

- Optional accessory: setting ring (code **6312**), long handle (code **7351**), bore gauge setter

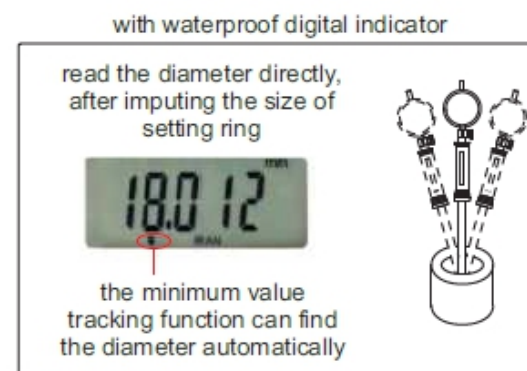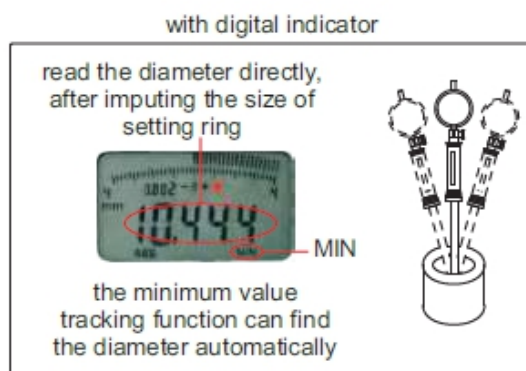

With dial indicator

| Code | Range | Indicator | Accuracy | Repeatability |
|----------|-----------|--|----------|---------------|
| 2530-100 | 50-100mm | dial indicator, range 10mm, graduation 0.01mm (code 2308-10FA) | ±0.018mm | 0.003mm |
| 2530-160 | 50-160mm | | ±0.018mm | 0.003mm |
| 2530-161 | 100-160mm | | ±0.018mm | 0.003mm |

With digital indicator (optional data output cable: code 7315-51B receiver is needed page 7, 7214-51B page 12, 7302-40M page 21)

| Code | Range | Indicator | Accuracy | Repeatability |
|----------|-----------|--|----------|---------------|
| 2130-100 | 50-100mm | digital indicator, code 2108-10F , range 12.7mm/0.5", resolution 0.002mm/0.0001" (can switch to 0.01mm/0.0005") | ±0.018mm | 0.003mm |
| 2130-160 | 50-160mm | | ±0.018mm | 0.003mm |
| 2130-161 | 100-160mm | | ±0.018mm | 0.003mm |

With waterproof digital indicator (optional data output cable: code 7315-51B receiver is needed page 7, 7214-51B page 12, 7302-40M page 21)

| Code | Range | Indicator | Accuracy | Repeatability |
|------------|-----------|---|----------|---------------|
| 2130-100WP | 50-100mm | waterproof digital indicator, code 2137-10F , range 12.7mm/0.5", dust/waterproof IP54, resolution 0.002mm/0.0001" (can switch to 0.01mm/0.0005") | ±0.018mm | 0.003mm |
| 2130-160WP | 50-160mm | | ±0.018mm | 0.003mm |
| 2130-161WP | 100-160mm | | ±0.018mm | 0.003mm |