

DIGITAL V-ANVIL MICROMETERS




IP65
WATERPROOF

DATA
OUTPUT

- Measure the diameter of parts or cutting tools with odd grooves, such as taps, reamers and end mills
- Resolution 0.001mm/0.00005"
- IP65 dust/waterproof
- Button function: on/off, set, mm/inch, data transmit
- Data output
- Automatic power off
- Ratchet stop
- Carbide measuring faces
- Supplied with setting standards
- Optional accessory:
wireless transmitter code **7315-31** (receiver is needed) page 6,
bluetooth transmitter code **7214-31** page 12,
data output cable code **7302-31** page 20



3590-153A

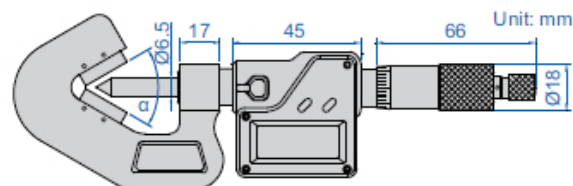

| Code | Range | Flutes | Accuracy | α | Type |
|-----------|------------------|--------|----------|------|------|
| 3590-153A | 1-15mm/0.04-0.6" | 3 | ±4μm | 60° | A |
| 3590-203A | 5-20mm/0.2-0.8" | 3 | ±4μm | 60° | B |
| 3590-353A | 20-35mm/0.8-1.4" | 3 | ±5μm | 60° | B |
| 3590-503A | 35-50mm/1.4-2.0" | 3 | ±5μm | 60° | B |
| 3590-653A | 50-65mm/2.0-2.6" | 3 | ±6μm | 60° | B |
| 3590-803A | 65-80mm/2.6-3.2" | 3 | ±6μm | 60° | B |
| 3590-953A | 80-95mm/3.2-3.6" | 3 | ±6μm | 60° | B |
| 3590-255A | 5-25mm/0.2-1.0" | 5 | ±4μm | 108° | B |

| Code | Range | Flutes | Accuracy | α | Type |
|------------|-------------------|--------|----------|------------|------|
| 3590-455A | 25-45mm/1.0-1.8" | 5 | ±5μm | 108° | B |
| 3590-655A | 45-65mm/1.8-2.6" | 5 | ±6μm | 108° | B |
| 3590-855A | 65-85mm/2.6-3.4" | 5 | ±6μm | 108° | B |
| 3590-1055A | 85-105mm/3.4-4.2" | 5 | ±6μm | 108° | B |
| 3590-257A | 5-25mm/0.2-1.0" | 7 | ±4μm | 128°34'17" | B |
| 3590-457A | 25-45mm/1.0-1.8" | 7 | ±4μm | 128°34'17" | B |
| 3590-657A | 45-65mm/1.8-2.6" | 7 | ±5μm | 128°34'17" | B |
| 3590-857A | 65-85mm/2.6-3.4" | 7 | ±5μm | 128°34'17" | B |